


Hex Jam Nuts

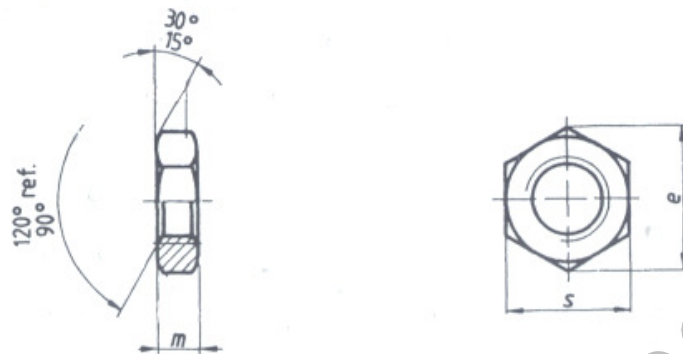

Diameter	E	S		M	
	Min.	Min.	Max.	Min.	Max.
M2.5	5.45	4.82	5	1.35	1.6
M3	6.01	5.32	5.5	1.55	1.8
M3.5	6.58	5.82	6	1.75	2
M4	7.66	6.78	7	1.95	2.2
M5	8.79	7.78	8	2.45	2.7
M6	11.05	9.78	10	2.9	3.2
M8	14.38	12.73	13	3.7	4
M10	18.9	16.73	17	4.7	5
M12	21.1	18.67	19	5.7	6
M14	24.49	21.07	22	6.42	7
M16	26.75	23.67	24	7.42	8
M18	29.5	26.16	27	8.42	9
M20	32.95	29.16	30	9.1	10
M22	35.03	31	32	9.9	11
M24	39.55	35	36	10.9	12
M27	45.2	40	41	12.4	13.5
M30	50.85	45	46	13.9	15
M36	60.79	53.8	55	16.9	18
M39	66.44	58.8	60	18.2	19.5
M42	71.3	63.1	65	19.7	21
M45	76.95	68.1	70	21.2	22.5
M48	82.6	73.1	75	22.7	24

Specification Requirements:

- Dimensions: DIN 439B
- Threads: 6H
- Material & Mechanical Properties:
 - Coarse Thread: ISO 898-2 Class 04.
 - Fine Thread: ISO 898-6 Class 04.