


## Serrated Hex Flange Nuts, Zinc Plated

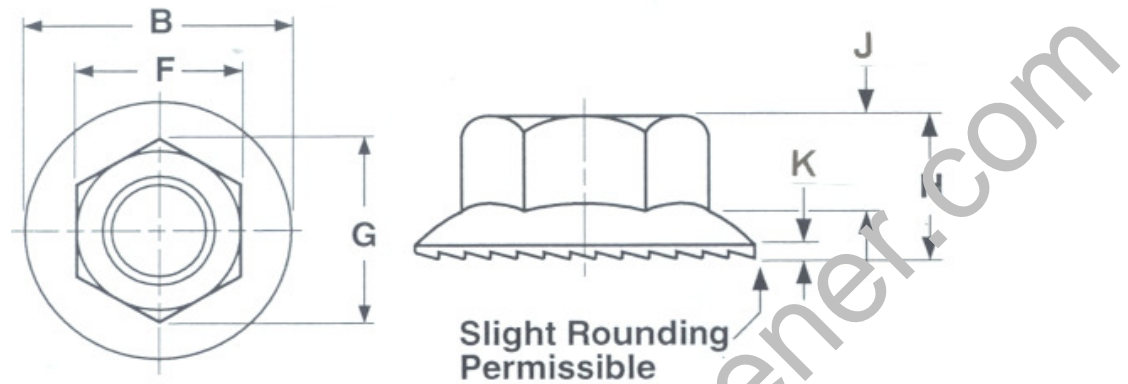

Nominal Size or Basic Major Dia. of Thread	F		G		B		h		J	K	Angularity of Bearing Surface	
	Width Across Flats		Width Across Corners		Flange Diameter		Nut Thickness		Wrenching Length	Flange Thickness		
	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.	Min.		Max.
No. 6	0.1380	0.312	0.302	0.361	0.342	0.422	0.408	0.171	0.156	0.10	0.02	0.014
8	0.1640	0.344	0.334	0.397	0.381	0.469	0.452	0.203	0.187	0.13	0.02	0.016
10	0.1900	0.375	0.365	0.433	0.416	0.502	0.480	0.219	0.203	0.13	0.03	0.017
12	0.2160	0.438	0.428	0.505	0.488	0.594	0.574	0.236	0.222	0.14	0.04	0.020
1/4	0.2500	0.438	0.428	0.505	0.488	0.594	0.574	0.236	0.222	0.14	0.04	0.020
5/16	0.3125	0.500	0.489	0.577	0.557	0.660	0.660	0.283	0.268	0.17	0.04	0.023
3/8	0.3750	0.562	0.551	0.650	0.628	0.750	0.728	0.347	0.330	0.23	0.04	0.025
7/16	0.4375	0.688	0.675	0.794	0.768	0.937	0.910	0.395	0.375	0.26	0.04	0.032
1/2	0.5000	0.750	0.736	0.866	0.837	1.031	1.000	0.458	0.437	0.31	0.05	0.035
9/16	0.5625	0.875	0.861	1.000	0.982	1.188	1.155	0.506	0.483	0.35	0.05	0.040
5/8	0.6250	0.938	0.922	1.083	1.051	1.281	1.248	0.569	0.545	0.40	0.05	0.044
3/4	0.7500	1.125	1.088	1.299	1.240	1.500	1.460	0.675	0.627	0.46	0.06	0.051

### Specification Requirements:

- Dimensional, Mechanical and Performance Standard: ASME B18.16.4
- Product Marking: Manufacturer's ID on 1/4 inch and above.
- Thread requirements: ASME B1.1 UNC & UNF, Class 2B.